



Digital Mass Flow Controller/Meter AFC 80MD / AFM 85MD

AFC & AFM Series



Features

The highest performances combined on the **Qualiflow Therm AFC 80 MD** and **AFM 85 MD** with :

- Regular winding flow sensor.
- 316L "totalseals" metal seals and electropolished ultra clean surface finish.
- Full potential of digital technology.

Accuracy

During calibration, a polynomial curve (fourth degree) calculated from 6 points gives an accuracy of :

- ± 1% of setpoint.....if setpoint > 20% of F.S.
- ± 0.2% of F.S.....if setpoint < 20% of F.S.

Less Inventory

Up to 10 calibration curves of different gases can be stored into the memory, easily changeable by user. To keep the benefit of accuracy, the maximum factor between the full scales is 3. A factor of 5 maintains an accuracy less than ± 1%, compatible with analog MFCs.

Optimized Numerical Control

The control of gas flow is done by a numerical algorithm assuming a control without overshoot at any setpoint and improving the response time. Each calibration curve is stored with its own regulation parameters.

Communication Modes

Analog mode : the MFC is 100% compatible with analog series, with the advantage to communicate via serial RS232C for maintenance, calibration.

RS485 option : allows to control up to 32 MFCs under MODBUS protocol (RJ11 connector).

DeviceNet or **PROFIBUS** high speed fieldbus.

Calibration

MFCs are calibrated with Nitrogen

Reference Standards..... Temperature □ 273.15K
..... Pressure □ 101325 Pa

Options

- External sensor input
- Low differential pressure
- DeviceNet or Profibus fieldbus connection
- RS485 / Modbus with 2 RJ11 connections


Specifications

Flow Range (equivalent N ₂).....	10 sccm to 30 slm
Control Range.....	2 and 100% F.S.
Valve Type.....	Electromagnetic
Valve Rest Position.....	Normally Open or Closed
Linearity.....	± 0.2% of setpoint (per calibration gas)
Repeatability.....	± 0.15% of F.S.
Sensitivity to Mounting Position.....	± 0.1% of F.S.
Step Response Time.....	□1 sec. typical (SEMI E17-91)
Temperature Range.....	5 – 50°C, non-condensing
Temperature Coefficient.....	< 0.5% F.S./°C
Maximum Inlet Pressure.....	1 MPa (10 bar, 150 psi)
Minimum Differential Pressure.....	50 kPa (0.5bar, 7psi)
.....	8 kPa (80mbar, 1.16psi) mini with low DP option
Maximum Differential Pressure.....	300 kPa (3bar, 43psi)
Pressure Coefficient.....	< 0.1% F.S./10 ⁵ Pa
Wetted Materials.....	316 L Stainless steel
.....	Kel-F
.....	Seals material
Surface Finish.....	0.2 μm (8 μinch) R _a max
Leak Integrity.....	< 2.10 ⁻¹⁰ atm.scc/sec (He)
Standard Seals.....	Pure 316L metal O-rings
.....	Metal
Fittings.....	¼" VCR, C-Seals, W-Seal, other on request
Weight.....	1.1Kg


Input and Output

Mass Flow Controller.....	± 15 VDC, 200 mA
Mass Flow Meter.....	± 15 VDC, 50 mA
Input and Output Signal.....	from 0 to 5 VDC
Digital Control.....	RS232C, Active full time
Electrical Connector.....	Sub-D 15 pins Male

Dimensions

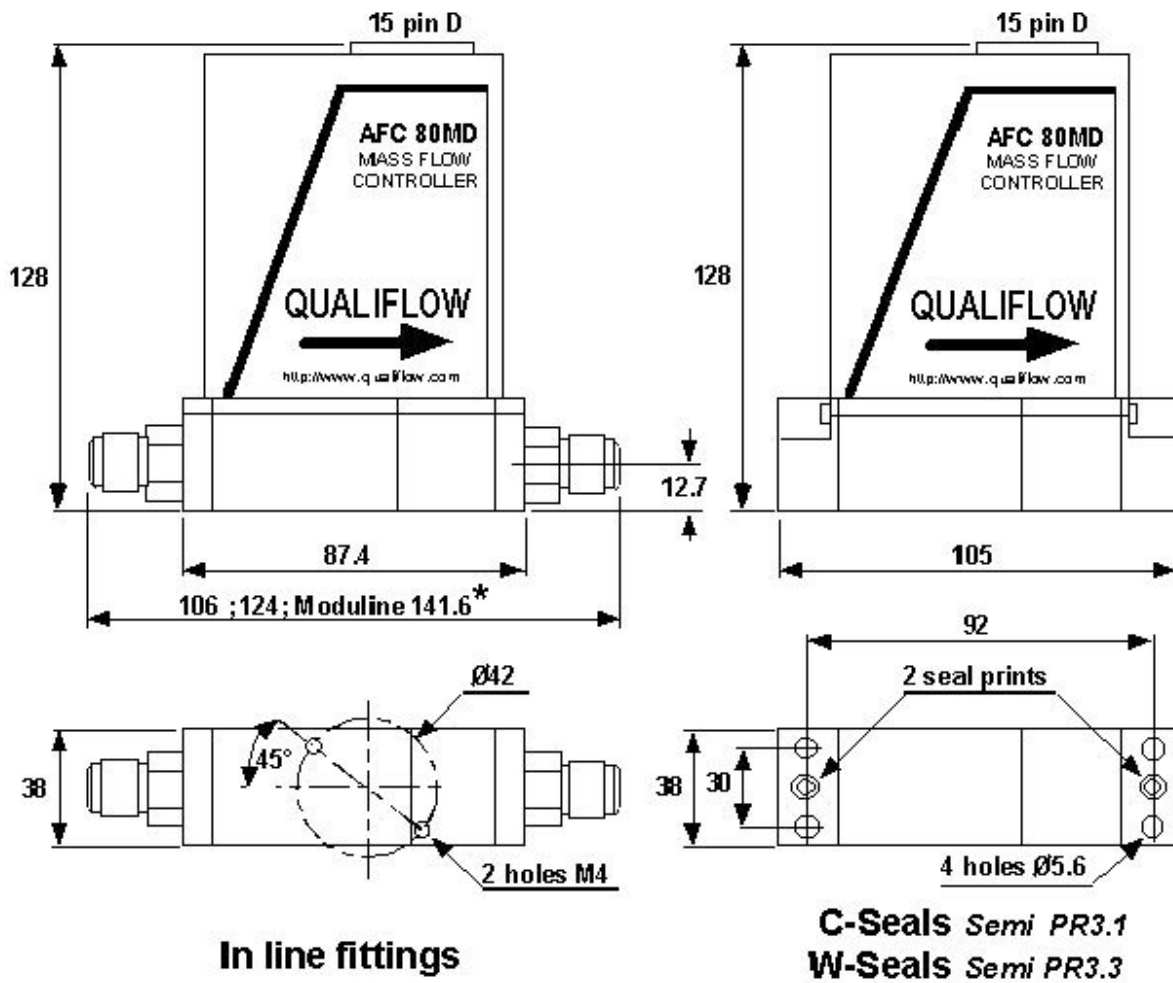

Pinout configuration

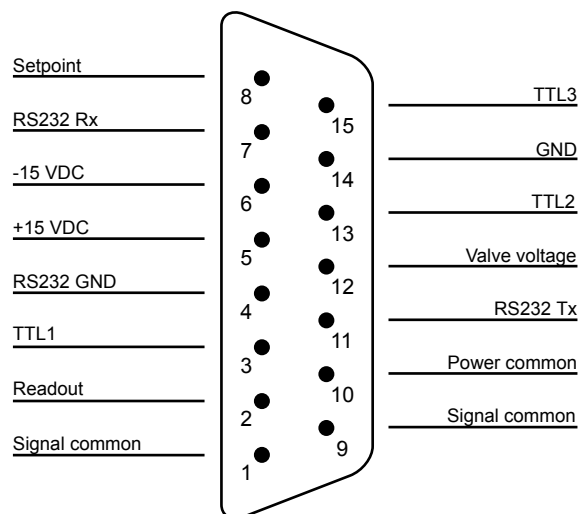

Connector 15-pin, type "D", male